

EC2002 Altitude Encoder



The EC2002 accurately reports the aircraft's altitude over a calibrated altitude range of -1000 to +35,000ft. The altitude output can be via the 10 line Gillham "Gray" code, or a 2 line serial data output.


The EC2002 will have the lowest power requirements of any altitude encoder today. The EC2002 will have a typical current consumption of 10 - 125mA.

This makes the EC2002 the logical choice for all battery only operators.

The EC2002's small size and light weight (only 95g / 3.25oz).

The chassis is flanged, and is pre-drilled with mounting holes for easy attachment.

The connections for the EC2002 consist of a DB-15 electrical connector, and a 1/8" NPT fitting for the static air pressure connection. The EC2002 emulates the pin assignments of many commonly used encoders making replacement very simple. The EC2002's serial and parallel altitude outputs make it compatible with all ATC transponders currently available.

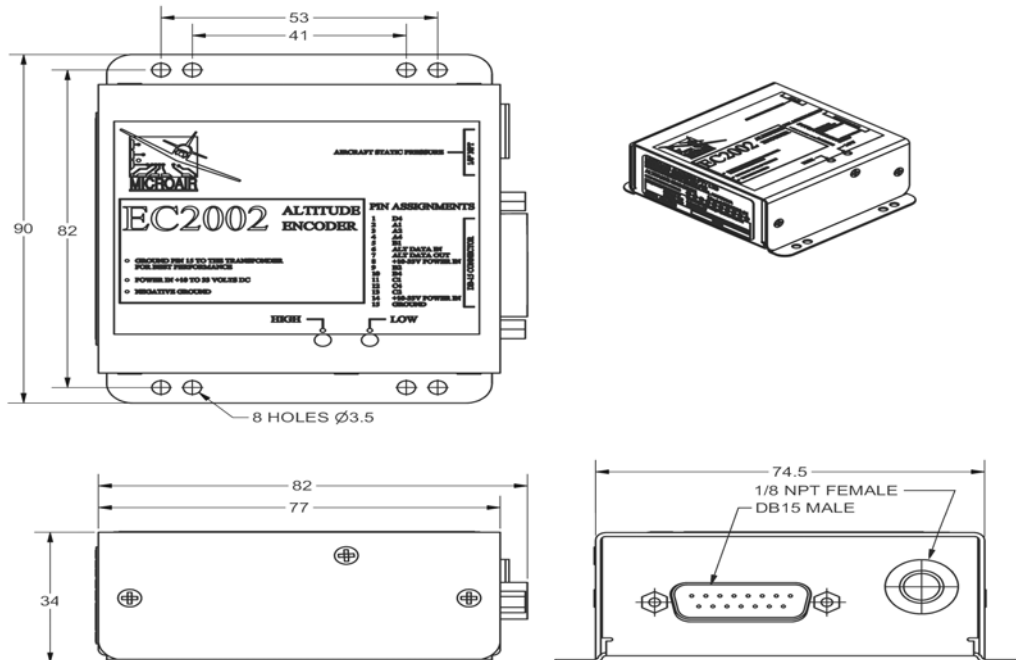

Microair Avionics Pty Ltd

Po Box 5532
Bundaberg West
Queensland 4670
Australia

Ph: +61 (0) 7 4155 3048
Fax: +61 (0) 7 4155 3049
email: sales@microair.com.au
web: www.microair.com.au

EC2002

Altitude Encoder

SPECIFICATIONS:

Compliance	TSO C88a SAE AS8003 RTCA DO-160F	Pending Compliant Compliant
Dimensions	Length Width Height	82mm (3.23") 90mm (3.54") 34mm (1.34")
Weight		95 gram (3.25 oz)
Connections	Electrical Pneumatic	DB-15 Sub D miniature 1/8" NPT Internal Thread
Power Consumption @ 14v	Without heater element With heater element	15mA 125mA
28v	With heater element	200mA
Input Voltage		10 – 33 volts
Code Output	Serial (RS232) Parallel	Microair ASCII Garmin AT Garmin Northstar Garmin Trimble Magellan Gillham Code
Altitude Range	Factory Calibrated	-1000 to +35,000 feet
Temperature	Operational	-20 to +55 degrees C
Time to first altitude code	Above 0°	10 seconds

Pin 1	D4	
Pin 2	A1	
Pin 3	A2	
Pin 4	A4	
Pin 5	B1	
Pin 6	RS232 In	
Pin 7	RS232 Out	
Pin 8	+14V or 28V	Input Voltage
Pin 9	B2	
Pin 10	B4	
Pin 11	C1	
Pin 12	C4	
Pin 13	C2	
Pin 14	+14V or +28V	Input Voltage
Pin 15	Ground	

